

Geostatistics in the SPRING

Exercise 1

Course: Master of Science on Geospatial Technologies
Professor: Carlos A. Felgueiras

Contents


1. Presentation of the spatial data to be used
2. Creating the initial DataBase in the SPRING
 - 2.1 Activating the SPRING program
 - 2.2 Creating a database named SaoCarlos
 - 2.3 Creating the Canchim project
 - 2.4 Creating a category of a DTM model
 - 2.5 Creating a category of a Thematic model
 - 2.6 Importing the altimetry original data of the Canchim region
 - 2.7 Importing unbiased (sem tendências) altimetry data of the Canchim region
 - 2.8 Importing data of the bounding (limits) of the Canchim farm
 - 2.9 Importing labels (identifiers) of the classes of the Canchim farm
 - 2.10 Displaying the data (points and bounding) in the main graphical display of the SPRING

1 Presentation of the spatial data to be used

The study are belongs to an experimental Farm, named Canchim, that is one physical base for researches developed in the EMBRAPA institute in Brazil. The farm is located in the São Carlos municipality of the Brazilian São Paulo state. This region contains an area equal to 2660 hectares and is located between the coordinates $21^{\circ}55'00''$ and $21^{\circ}59'00''$, latitude south, and between $47^{\circ}48'00''$ and $41^{\circ}52'00''$, longitude west.

For purpose of geostatistics modeling it will be used a set of sample points irregularly distributed in the Canchim region

The figure below illustrates the geographic localization of the Canchim farm along with this bounding and the sample set of elevations (altimetry) inside the Canchim region. The background map is the Dirichlet map (that shows the influence region of each sample) presented in gray level following the legend attached to the figure.

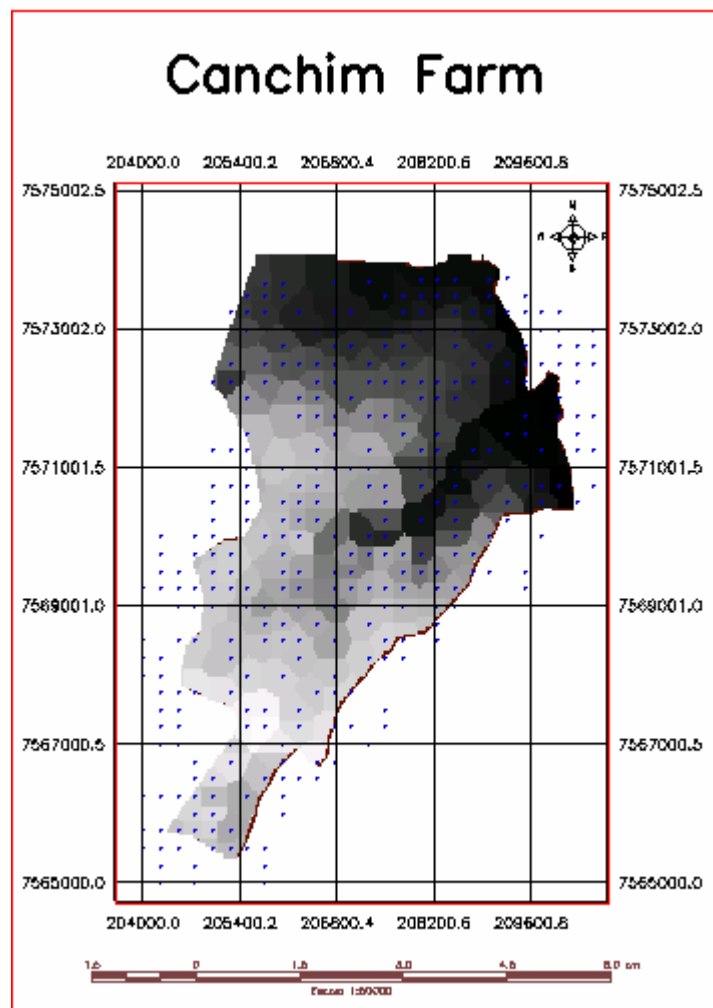

2. Creating the initial DataBase in the SPRING


2.1 Activating the SPRING program

- Copy (Unzip) the contents of the zipped file *GeostatisticsCourse.zip* to the root of your Hard Disk (c:\ for example). You will have a directory named *c:\curso_geoest* with 4 subdirectories: Classes, Laboratories, Programs and springdb and 6 input data files (.spr).

- Double click on the SPRING icon  in desktop area of your computer

2.2 Creating a database named SaoCarlos


- From the **File** menu of the SPRING, select the **DataBase** option
- Click on the **Directory... button** of the DataBase window
- In the Directory Selection window
 - Select: *c:\curso_geoest\springdb* (or other directory with your data)
 - Click on the **OK button** to return to the DataBase window
- In the DataBase window
 - Fill out the **Name** field with the name: *SaoCarlos*
 - Select as your **DBMS (Data Base Management System)**: *SQLite*
 - Click on the **Create button**
 - Select, in the **DataBase list**, the database *SaoCarlos*
 - Click on the **Apply button** in order to activate the *SaoCarlos* database

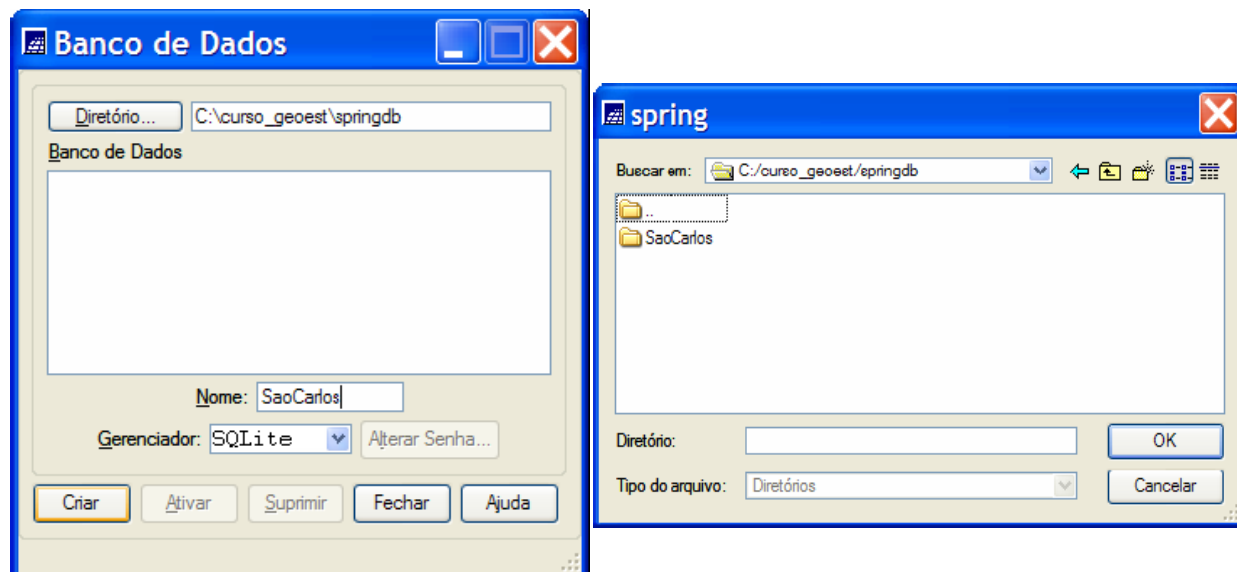

- Click on the **Close button** to quit the DataBase window.

2.3 Creating the Canchim project

- Select the **Project option** from the **File menu** of the SPRING,
- In the Projects window
 - Fill out the **Name field** with: *Canchim*
 - Click on the **Projection...** button to open the Projection window
 - In the projection window
 - Choose from the **list of Systems**: *UTM*
 - Choose from the **list of Earth Models**: *Hayford*,
 - Fill out the Zone field with the value 23 and click on CR button at the right side of the Zone field
 - Click on the Apply button
 - Click on the Close button to quit the Projections window

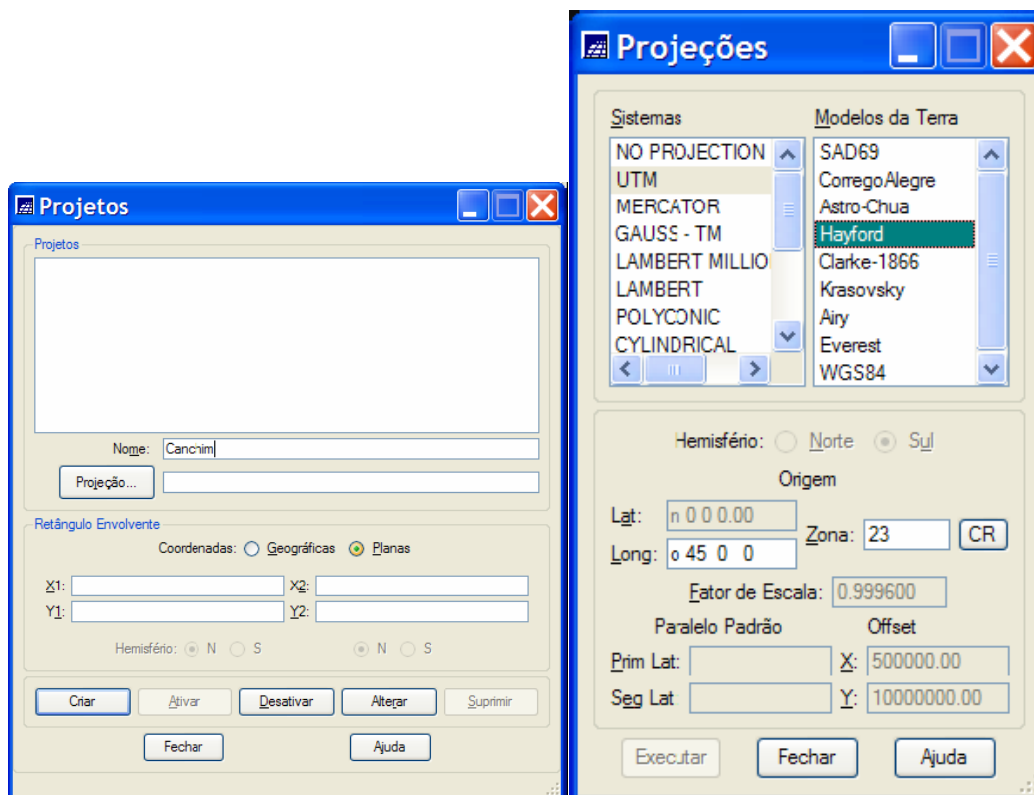

- Back to the Projects window
 - Choose **Planes** to define the Bounding Box of the project
 - Fill out the bounding box text fields with the following values
 - X1: **204000** X2: **211000**
 - Y1: **7565000** Y2: **7575000**
 - Choose **S** as Hemisphere for both coordinate points above defined
 - Click on the **Create button** to create the project
 - Activate the project clicking on the **Load button**
 - Click on the **Close button** to quit the Projects window

2.4 Creating a category of a DTM model

- Select the **Data Model...** option from the **File menu** of the SPRING
- In the Data Model window
 - Fill out the **Name field** with: *Altimetria*
 - Choose from options of **Models** : *DTM*

Modelo de Dados

Categorias

Visual...

Atributos...

Nome: Altimetria Tabela:

Modelos

☐ Imagem ☐ Cadastral

☒ MNT ☐ Rede

☐ Temático ☐ Não-Espacial

☐ Objeto

Criar Alterar Suprimir

Classes Temáticas

Visual...

Atributos...

Dados...

Nome: Tabela: CR

Criar Alterar Suprimir

Executar Fechar Ajuda

- Click on the **Create button** to create the category
- Click on the **Apply button**
- Click on the **Close button** to quit the Data Models window

2.5 Creating a category of a Thematic model

- Select the **Data Model...** option from the **File menu** of the SPRING
- In the *Data Model window*
 - Fill out the **Name field** with: *Limites*
 - Choose from options of **Models** : *Thematic*
 - Click on the **Create button** of the Categories
 - Type the **Name cl1** as the first name of the Thematic Classes
 - Click on the **Create button** of the Thematic Classes
 - Click on the **Apply button**

Modelo de Dados

Categorias

Altimetria
Limites

Visual...
Atributos...

Nome: Limites Tabela:

Modelos

☐ Imagem ☒ Cadastral
☐ MNT ☐ Rede
☒ Temático ☐ Não-Espacial
☐ Objeto

Criar Alterar Suprimir

Classes Temáticas

1. cl1

Visual...
Atributos...
Dados...

Nome: cl1 Tabela: CR



Criar Alterar Suprimir

Executar Fechar Ajuda

- Click on the **Close button** to quit the Data Models window

2.6 Importing the altimetry data (pontos originais) of the Canchim region


- Select **option Import...** from the **File menu** of the SPRING,
- Click on the **Directory...** button
- In the *Directory window*
 - Select as **Directory:** *c:\curso_geoest* e click on the **OK button**
 - Select as **Format:** *ASCII-SPRING*
 - Select as **File:** *pontos_originais.spr*
 - Select as **Entity:** *Sample(DTM)*
 - Select as **Unity:** *m* (meters)
 - Define for the **Scale** value: *10000*
 - Define the values **Res. X:** *35* and **Res. Y:** *50*
 - Keep current values for **Projection** and **Bounding Box** of the project.
 - Keep the current **Project Name** (Canchim)
 - Click on **Categories...** button
 - In the *Category window*
 - Choose **Category** *Altimetria*
 - Click on the **Apply button**
 - Fill out the **field IF**(Info Layer) with the name: *pts_originais*
 - Click on the **Apply button**

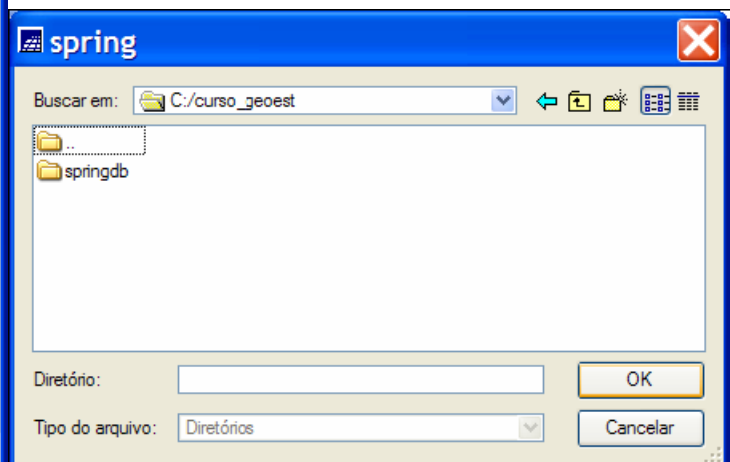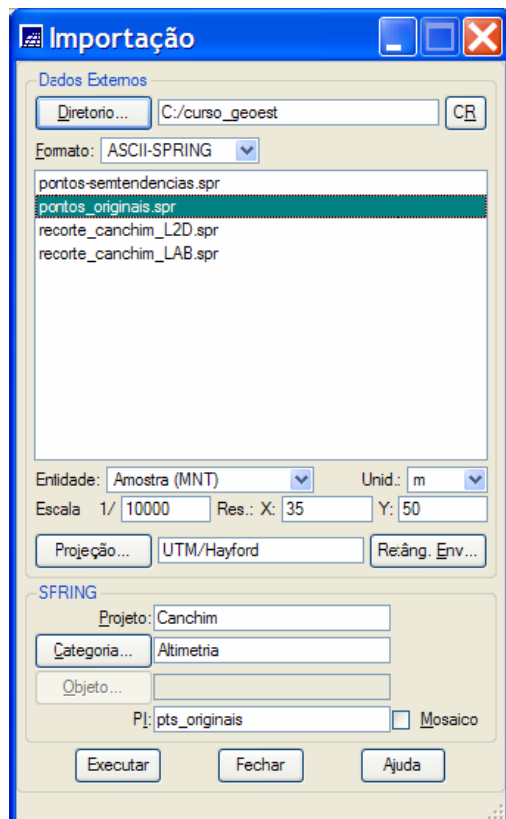

- Quit the import window clicking on the **Close button**

2.7 Importing the altimetry data (pontos sem tendências) of the Canchim region


- Select **option Import...** from the **File menu** of the SPRING,
- Click on the **Directory...** button
- In the *Directory window*
 - Select as **Directory:** *c:\curso_geoest* e click on the **OK button**
 - Select as **Format:** *ASCII-SPRING*
 - Select as **File:** *pontos_semtendencias.spr*
 - Select as **Entity:** *Sample (DTM)*
 - Select as **Unity:** *m* (meters)
 - Define for the **Scale** value: *10000*
 - Define the values **Res. X:** *35* and **Res. Y:** *50*
 - Keep current values for **Projection** and **Bounding Box** of the project.
 - Keep the current **Project Name** (Canchim)
 - Click on **Categories...** button
 - In the *Category window*
 - Choose **Category** *Altimetria*
 - Click on the **Apply button**
 - Fill out the **field IF** (Info Layer) with the name: *pts_semtendencias*
 - Click on the **Apply button**

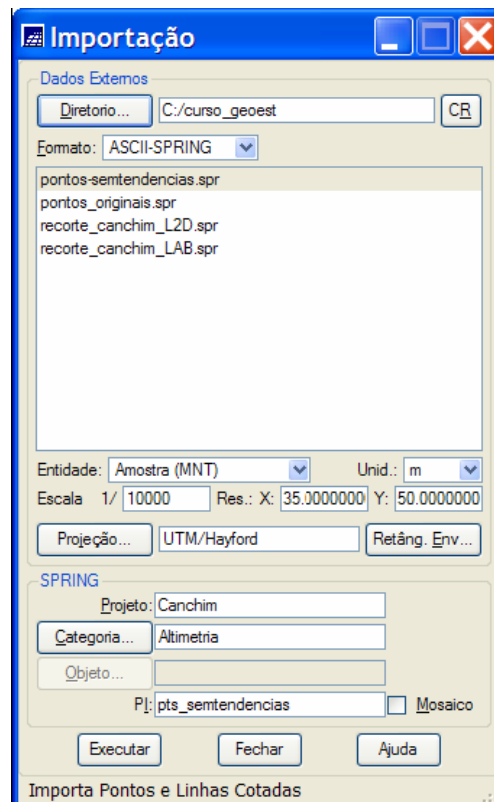

- Quit the import window clicking on the **Close button**

2.8 Importing the farm's bounding data (recorte) of the Canchim region


- Select **option Import...** from the **File menu** of the SPRING,
- Click on the **Directory...** button
- In the *Directory window*
 - Select as **Directory:** *c:\curso_geoest* e click on the **OK button**
 - Select as **Format:** *ASCII-SPRING*
 - Select as **File:** *recorte_canchim_L2D.spr*
 - Select as **Entity:** *Lines with topology*
 - Select as **Unity:** *m* (meters)
 - Define for the **Scale** value: *10000*
 - Define the values **Res. X:** *35* and **Res. Y:** *50*
 - Keep current values for **Projection** and **Bounding Box** of the project.
 - Keep the current **Project Name** (Canchim)
 - Click on **Categories...** button
 - In the *Category window*
 - Choose **Category** *Limites*
 - Click on the **Apply button**
 - Fill out the **field PI** (InfoLayer) with the name: *recorte*
 - Click on the **Apply button**

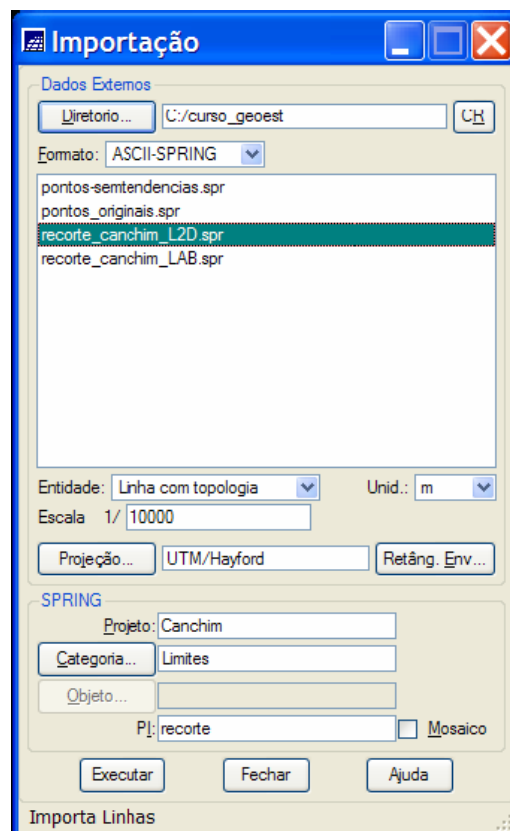

- Quit the import window clicking on the **Close button**

2.9 Importing class identifiers (“labels”) of the Canchim farm


- Select **option Import...** from the **File menu** of the SPRING,
- Click on the **Directory...** button
- In the *Directory window*
 - Select as **Directory:** *c:\curso_geoest* e click on the **OK button**
 - Select as **Format:** *ASCII-SPRING*
 - Select as **File:** *recorte_canchim_L2D.spr*
 - Select as **Entity:** *Labels*
 - Select as **Unity:** *m* (meters)
 - Define for the **Scale** value: *10000*
 - Keep current values for **Projection** and **Bounding Box** of the project.
 - Keep the current **Project Name** (Canchim)
 - Click on **Categories...** button
 - Keep the **field PI** (InfoLayer) with the name: *recorte*
 - Click on the **Apply button**

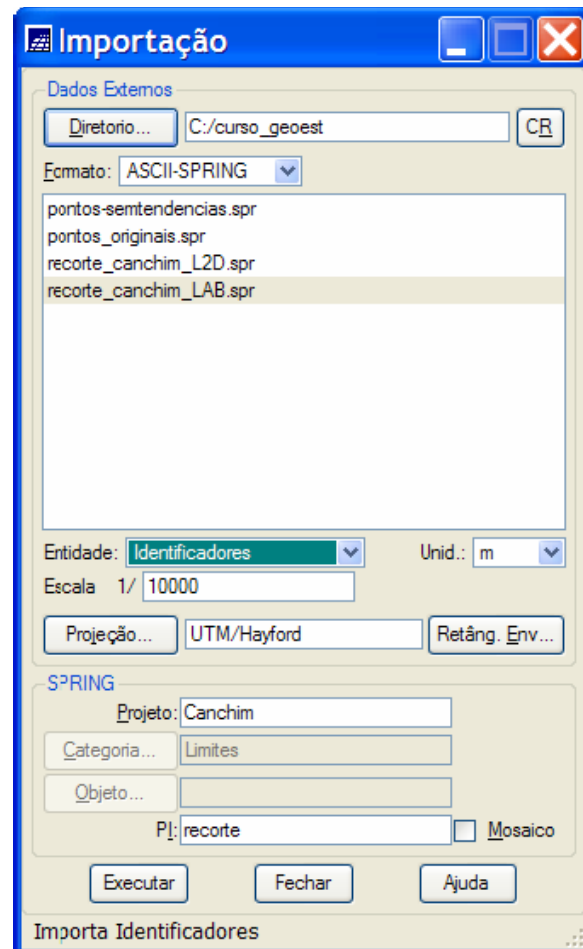


- Quit the import window clicking on the **Close button**

2.10 Displaying the Canchim area and the sample points in the main display (display number 1) of the SPRING

- In the Control Panel
 - Activate the Display 1
 - Select in the **Category list:** *Altimetria*
 - Select in the **InfoLayer list:** *pts_originais*
 - Select as representation *Samples*

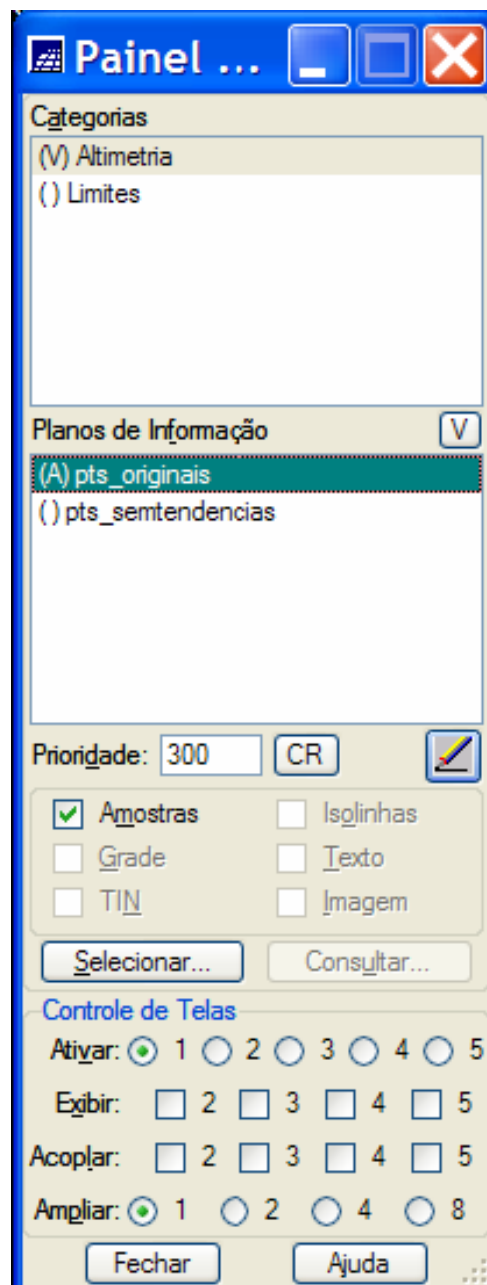

- In the Control Panel
 - Select in the **Category list:** *Limites*
 - Select in the **InfoLayer list:** *recorte*
 - Select as representation *Lines*

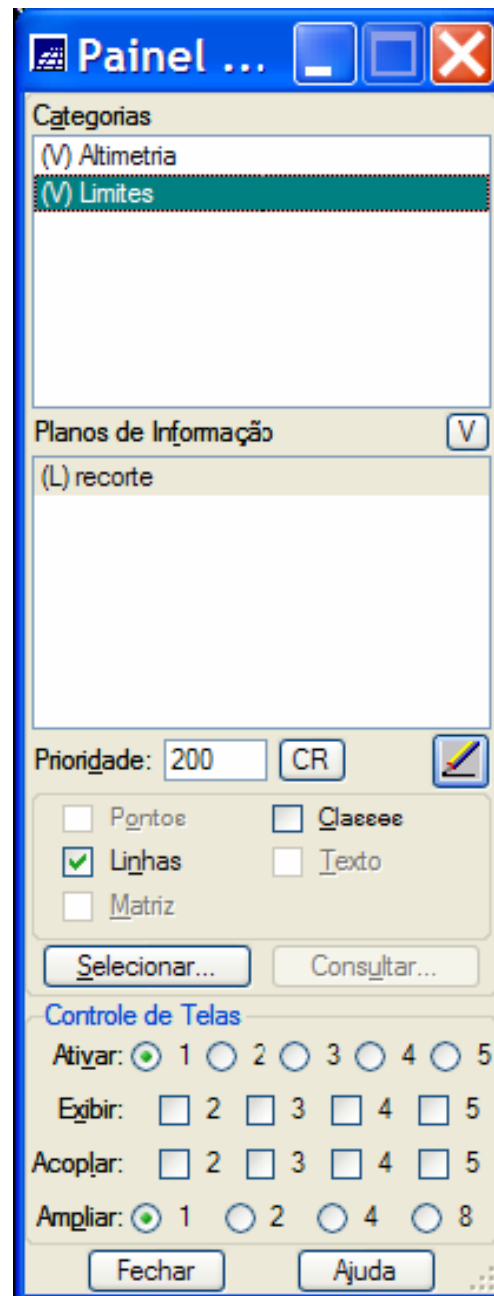

- Click on the **Draw Icon**  of the **Control Panel** or of the **SPRING** tool bar

- The Figure below illustrates the results of the visualization operations above done

